

HB -SERIES



ZGSM

SAVE TODAY'S ENERGY FOR TOMORROW



LM-79
LM-80

IP66
IK10



CE CB

RoHS
Compliant



7 YEAR
WARRANTY

LED BAY/FLOOD LIGHTS



Overview

The ZGSM® HB-Series LED bay/flood lights are using PHILIPS LUMILEDS® luminous source, providing excellent lumen output, long-lasting stability and splendid sight.

The ZGSM HB-Series LED bay/flood lights have a high luminous efficiency and better service life. Provide 7 years warranty on luminaire.

Color Options

● Silver Gray

HIGH-EFFICACY LED LIGHT SOURCE



Philips Lumileds Luxeon TX
Greater than 135lm/W high efficacy, illumination grade LED light source.



Philips Lumileds 3030 2D
Greater than 150lm/W high efficacy, illumination grade LED light source.



Philips Lumileds 5050
Greater than 185lm/W high efficacy, illumination grade LED light source.

HIGH-END LED DRIVER (Two options)

+ NON-DIMMABLE



High-end Mean Well HLG Series LED driver, optimal stability, performance and lifespan.

+ DIMMABLE





High-end Inventronics programmable LED driver, integrate dimming function and 6KV /10KV surge protection. Provide excellent performance and lifespan.

AIR CONVECTION EFFECT




Reasonable heat sink design, not only keep ventilation but also avoid laceration.

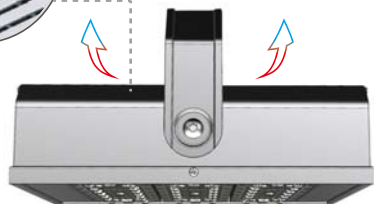


Gaps between each module increase heat dissipation speed and solve the problem of dust deposition.

FLEXIBLE COMBINATIONS OF MODULES

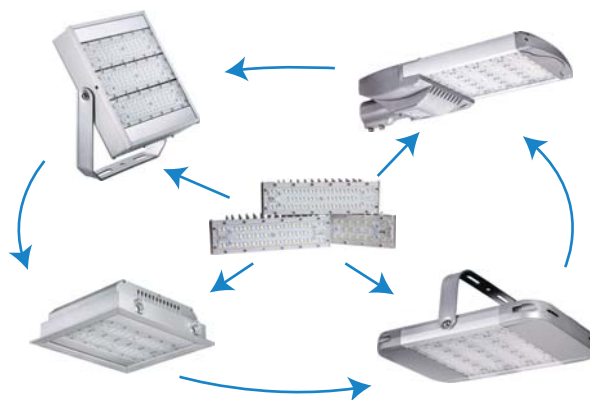


Optics

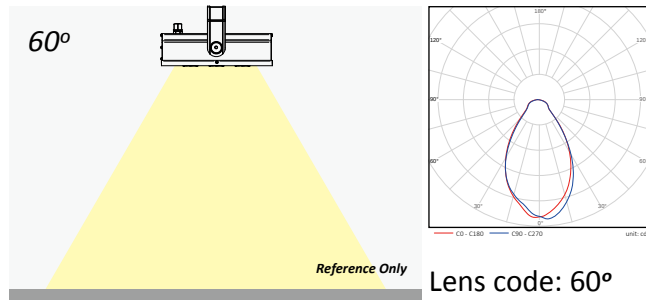

Applications:

Bay Light: Shelf Aisle | High Hall | High Workshop


Flood Light: Billboard | Area | Architecture | Landscape Lighting

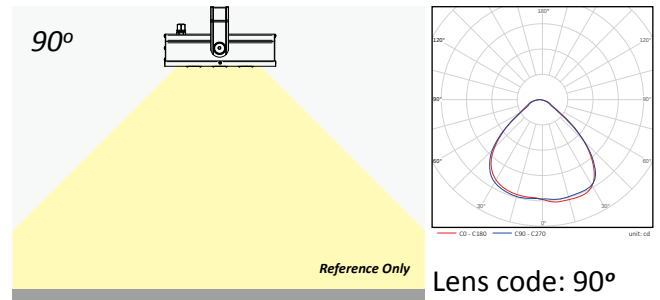

Applications:

Bay Light: Warehouse | Workshop

Flood Light: Billboard | Area | Architecture | Landscape Lighting

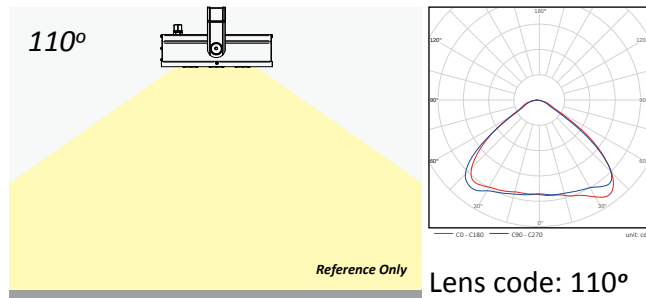


Applications:

Bay Light: Warehouse | Workshop | Gas Station

Flood Light: Billboard | Area | Architecture | Landscape Lighting

Design Features




Professional lens design with 60°, 90° and 110° optional.



Use M16 waterproof connector, avoid hard power damage.



Full aluminum made, sufficient heat dissipation area also no corrosion worries.



A special tailor-made packaging designed to guarantee the highest protection of the lamp.



Use waterproof connector for internal wiring, safe, convenient & fast.



Innovative pluggable connector, clean & efficient.



UL standard connection.



The exquisite and innovated frame holder not only makes the installation more simple but also firmer.

DETAILED FEATURES

Electrical & Photometric

★ 3030 Version

Number of Modules	Model*1	LED Working Current	Power	Luminaire Efficacy (+/- 5%)	Lumen Output (+/- 5%)	Input Voltage	LED Brand	Driver Brand	Light Distributions	CCT (K)	Lifetime (h)						
1	ZGSM-GCD40H4B	95mA	40W	140 lm /w	5600 lm	100-240V /277V AC 50 /60Hz	Philips Lumileds 3030 2D	MeanWell Inventronics	60° 90° 110°	3000*2 4000 5000 5700	>100,000 (L70)						
	ZGSM-FGD40H4B																
	ZGSM-GCD50H5B	115mA	50W	130 lm /w	6500 lm												
	ZGSM-FGD50H5B																
2	ZGSM-GCD60H6B	145mA	60W	125 lm /w	7500 lm												
	ZGSM-FGD60H6B																
	ZGSM-GCD80H4B	100mA	80W	140 lm /w	11200 lm												
	ZGSM-FGD80H4B																
3	ZGSM-GCD100H5B	120mA	100W	130 lm /w	13000 lm												
	ZGSM-FGD100H5B																
	ZGSM-GCD120H6B	145mA	120W	125 lm /w	15000 lm												
	ZGSM-FGD120H6B																
4	ZGSM-GCD120H4B	100mA	120W	140 lm /w	16800 lm												
	ZGSM-FGD120H4B																
	ZGSM-GCD150H5B	120mA	150W	130 lm /w	19500 lm												
	ZGSM-FGD150H5B																
5	ZGSM-GCD180H6B	145mA	180W	125 lm /w	22500 lm												
	ZGSM-FGD180H6B																
	ZGSM-GCD160H4B	100mA	160W	140 lm /w	22400 lm												
	ZGSM-FGD160H4B																
6	ZGSM-GCD200H5B	120mA	200W	130 lm /w	26000 lm												
	ZGSM-FGD200H5B																
	ZGSM-GCD240H6B	145mA	240W	125 lm /w	30000 lm												
	ZGSM-FGD240H6B																
7	ZGSM-GCD200H4B	100mA	200W	140 lm /w	28000 lm												
	ZGSM-FGD200H4B																
	ZGSM-GCD240H5B	120mA	240W	130 lm /w	31200 lm												

*1 Model of Bay Light: ZGSM-GCDXXHXB | Model of Flood Light: ZGSM-FGDXXHXB.

*2 Luminous Efficacy of 3000K is 5% lower than other CCTs.

★ 5050 Version

Number of Modules	Model*1	LED Working Current	Power	Luminaire Efficacy (+/- 5%)	Lumen Output (+/- 5%)	Input Voltage	LED Brand	Driver Brand	Light Distributions	CCT (K)	Lifetime (h)
1	ZGSM-GCD40H4B	48mA	40W	165 lm /w	6600 lm	100-240V /277V AC 50 /60Hz	Philips Lumileds 5050	MeanWell Inventronics	110°	3000*2 4000 5000 5700	>100,000 (L70)
	ZGSM-FGD40H4B										
	ZGSM-GCD50H5B	59mA	50W	160 lm /w	8000 lm						
	ZGSM-FGD50H5B										
ZGSM-GCD60H6B	75mA	60W	155 lm /w	9300 lm							
ZGSM-FGD60H6B											
2	ZGSM-GCD80H4B	50mA	80W	165 lm /w	13200 lm						
	ZGSM-FGD80H4B										
	ZGSM-GCD100H5B	61mA	100W	160 lm /w	16000 lm						
	ZGSM-FGD100H5B										
ZGSM-GCD120H6B	75mA	120W	155 lm /w	18600 lm							
ZGSM-FGD120H6B											
3	ZGSM-GCD120H4B	50mA	120W	165 lm /w	19800 lm						
	ZGSM-FGD120H4B										
	ZGSM-GCD150H5B	58mA	150W	160 lm /w	24000 lm						
	ZGSM-FGD150H5B										
ZGSM-GCD180H6B	75mA	180W	155 lm /w	27900 lm							
ZGSM-FGD180H6B											
4	ZGSM-GCD160H4B	50mA	160W	165 lm /w	26400 lm						
	ZGSM-FGD160H4B										
	ZGSM-GCD200H5B	58mA	200W	160 lm /w	32000 lm						
	ZGSM-FGD200H5B										
ZGSM-GCD240H6B	75mA	240W	155 lm /w	37200 lm							
ZGSM-FGD240H6B											
5	ZGSM-GCD200H4B	50mA	200W	165 lm /w	33000 lm						
	ZGSM-FGD200H4B										
	ZGSM-GCD240H5B	61mA	240W	160 lm /w	38400 lm						
ZGSM-FGD240H5B											

*1 Model of Bay Light: ZGSM-GCDXXHXB | Model of Flood Light: ZGSM-FGDXXHXB.

*2 Luminous Efficacy of 3000K is 5% lower than other CCTs.

★ 3535 Version

Number of Modules	Model*1	LED Working Current	Power	Luminaire Efficacy (+/- 5%)	Lumen Output (+/- 5%)	Input Voltage	LED Brand	Driver Brand	Light Distributions	CCT (K)	Lifetime (h)
1	ZGSM-GCD40HB ZGSM-FGD40HB	860mA	40W	110 lm /w	4400 lm	100-240V /277V AC 50 /60Hz	Philips Lumileds Luxeon TX	MeanWell Inventronics	60° 90° 110°	3000*2 4000 5000 5700	>100,000 (L70)
2	ZGSM-GCD80HB ZGSM-FGD80HB	900mA	80W	110 lm /w	8800 lm						
3	ZGSM-GCD120HB ZGSM-FGD120HB	900mA	120W	110 lm /w	13200 lm						
4	ZGSM-GCD160HB ZGSM-FGD160HB	900mA	160W	110 lm /w	17600 lm						
5	ZGSM-GCD200HB ZGSM-FGD200HB	900mA	200W	110 lm /w	22000 lm						
6	ZGSM-GCD240HB ZGSM-FGD240HB	900mA	240W	110 lm /w	26400 lm						

*1 Model of Bay Light: ZGSM-GCDXXHXB | Model of Flood Light: ZGSM-FGDXXHXB.

*2 Luminous Efficacy of 3000K is 5% lower than other CCTs.

Working Environment & Packing

Number of Modules	Working Environment	Storage Temperature	Rating	CRI	Power Factor	Power Efficiency	Material	Product Dimensions (mm)	Carton Size (mm)	N.W (kg)	G.W (kg)
1	-40 °C ~ +50 °C 10% ~ 90%RH	-40 °C ~ +50 °C	Class I IP66 IK10	>70	>0.95	>90%	Housing: Aluminium Alloy; Lens: PC	166*270*165(Bay Light) 166*270*190(Flood Light)	285*370*200	2.4	3.1
2								239*270*165(Bay Light) 239*270*227(Flood Light)	355*370*200	3.6	4.4
3								312*270*165(Bay Light) 312*270*263(Flood Light)	430*370*200	4.5	5.4
4								385*270*165(Bay Light) 385*270*300(Flood Light)	505*370*200	5.4	6.3
5								458*270*165(Bay Light) 458*270*336(Flood Light)	580*370*200	6.3	7.2
6								531*270*165(Bay Light) 531*270* 373(Flood Light)	650*370*200	7.1	8.1

Note: Above data of weight are all typical values.

Certification

Manufacturer
ISO9001, ISO14001
HB Series [ZGSM-GCD40HB, ZGSM-GCD80HB, ZGSM-GCD120HB, ZGSM-GCD160HB, ZGSM-GCD200HB, ZGSM-GCD240HB]
HB Series [ZGSM-FGD40HB, ZGSM-FGD80HB, ZGSM-FGD120HB, ZGSM-FGD160HB, ZGSM-FGD200HB, ZGSM-FGD240HB]
CE, ROHS, GS, CB, SAA, UL, cUL, DLC, LM79, LM80
H4B/H5B Series [ZGSM-GCD40H4B, ZGSM-GCD80H4B, ZGSM-GCD120H4B, ZGSM-GCD160H4B, ZGSM-GCD200H4B ZGSM-GCD50H5B, ZGSM-GCD100H5B, ZGSM-GCD150H5B, ZGSM-GCD200H5B, ZGSM-GCD240H5B]
H4B/H5B Series [ZGSM-FGD40H4B, ZGSM-FGD80H4B, ZGSM-FGD120H4B, ZGSM-FGD160H4B, ZGSM-FGD200H4B ZGSM-FGD50H5B, ZGSM-FGD100H5B, ZGSM-FGD150H5B, ZGSM-FGD200H5B, ZGSM-FGD240H5B]
CE, ROHS, LM80
H6B Series [ZGSM-GCD60H6B, ZGSM-GCD120H6B, ZGSM-GCD180H6B, ZGSM-GCD240H6B ZGSM-FGD60H6B, ZGSM-FGD120H6B, ZGSM-FGD180H6B, ZGSM-FGD240H6B]
CE, ROHS, LM80

Variety applications

Bay light with short bracket




Flood light with long bracket




Installation of Bay Light


★ Mounting Bracket

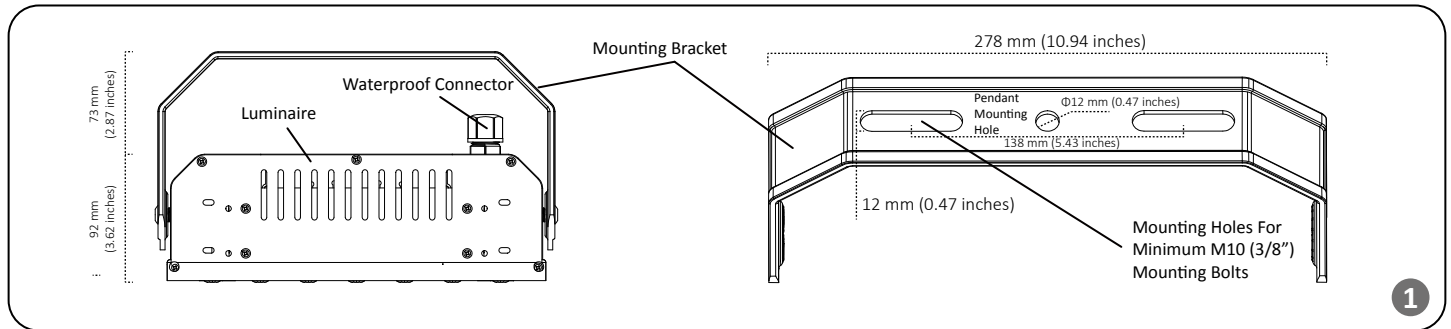

★ Direct Mounting

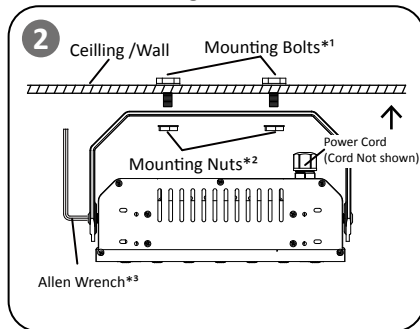

*1 Minimum M10 (3/8") Bolts (not-provided) *2 Mounting Nuts are not provided *3 Allen Wrench: 8mm (5/16")

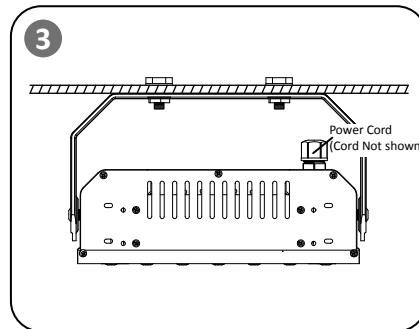

STEP 1:

Assemble the mounting bracket to the fixture by provided M10 (3/8") round head screws.

STEP 2:

Mount the fixture by two(2) minimum M10 (3/8") bolts. See image 2.


STEP 3:

Loosen the mounting bracket screws, adjust the fixture to desired position, re-secure the screws.


STEP 4:

Connect the **Power Cord** to the supply wiring per "Electrical Connections" section for completing electrical connections.

★ Pendant Mounting

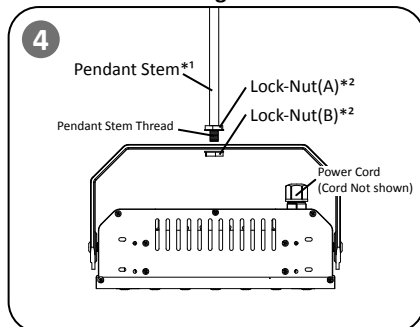

*1 Pendant Stem can not be the soft material (not-provided) *2 Lock Nuts are not provided

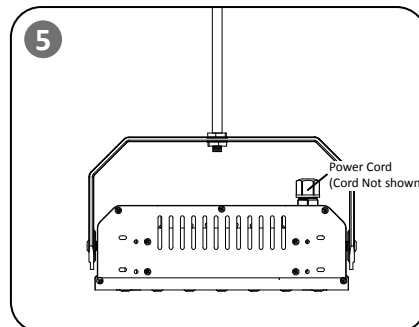

STEP 1:

Assemble the mounting bracket to the fixture by provided M10 (3/8") round head screws.

STEP 2:

Attach Lock-Nut(A) to the bottom of the Pendant Stem. Attach Lock-Nut(B) by holding the interjacent Fixture Bracket and tightening Lock-Nut(B) until secure. See image 4.

STEP 3:


Loosen the mounting bracket screws, adjust the fixture to desire position, re-secure the screws.

STEP 4:



Connect the **Power Cord** to the supply wiring per "Electrical Connections" section for completing electrical connections.

Installation of Flood Light

★ Direct Mounting

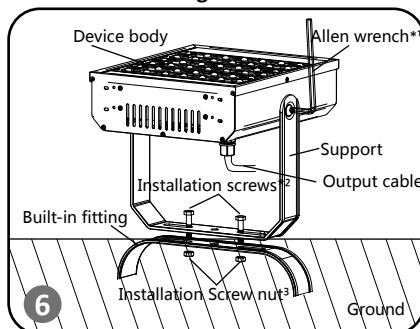


*1 Allen wrench: 8mm(5/16") *2 Minimum M10(3/8") screws (Not provided) *3 Screw nuts (Not provided)

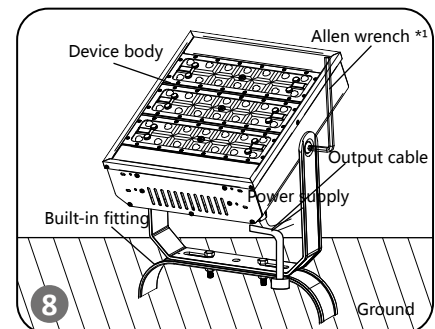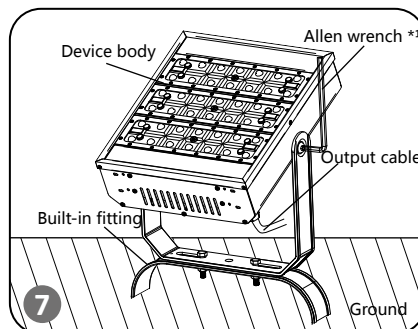

STEP 1: Use an Allen wrench to fix the body and the support (is not necessary to tighten the screws too hard). Align support and built-in fitting, tighten the screws as image 6.

STEP 2: Settle in the adequate angle position and use Allen screw to fix it as image 7.

STEP 3: Connect wire as image 8.

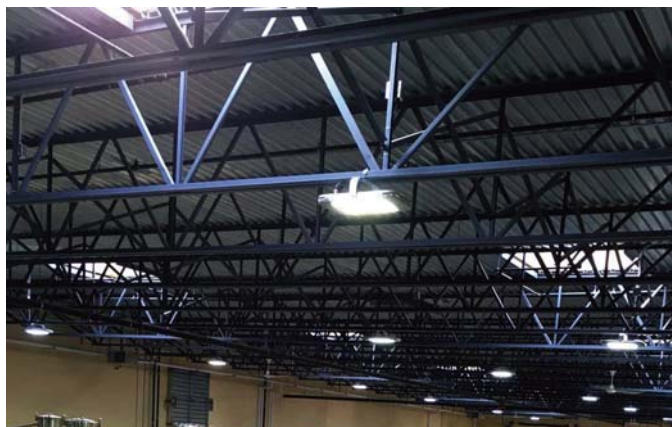


- for Low Bay Applications(Series-H), Canada



- for Low Bay Applications(Series-H), Spain



- for Low Bay Applications(Series-H), Italy

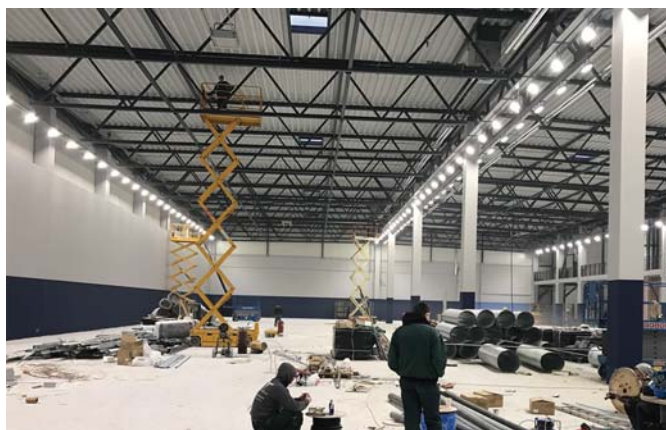

- for flood light Applications(Series-HB), Lithuania



- for flood light Applications(Series-HB), Czech Republic



- for flood light Applications(Series-HB), Dubai